


## Installation Dimension Drawing



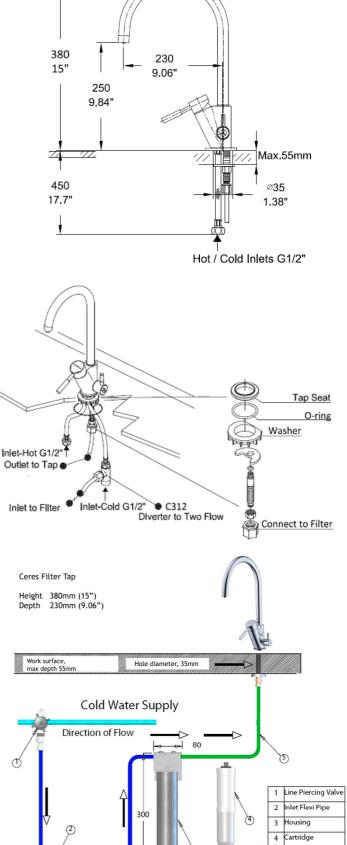

Outlet Flexi Pipe

5

## Features

- Single lever handle dispenses hot/cold water
- Dedicated lever handle for filtered drinking water
- High quality ceramic valves
- Includes an integrated filter system with stainless steel filter cartridge housing
- Advanced, ceramic and carbon filter cartridge
- Exceptional filtration performance to below 1 Micron removes and reduces contaminants including harmful bacteria, chlorine and lead
- Easy installation
- 5 year mechanical parts warranty

Material: Solid brass machined body and tubular brass spout

- Tails: G 1/2" flexi-tails
- Tap Height: 380mm
- Spout Reach: 230mm
- Minimum Water Pressure: 1 bar/15 psi
- Maximum Water Pressure: 75 PSI (5 bar)
- Flow: 3.5 litres per minute at a pressure of 1 bar/ 15 psi
- Maximum Hot-Water Temperature: 70°c

Recommended Hot Water Temperature: 65°c