

CARE INSTRUCTIONS & WARRANTY INFORMATION FOR YOUR TAP

Thank you for purchasing a TapSpares UK Rivaro kitchen tap.

Care & Maintenance

Your tap's finish has a 1 year guarantee. Wipe over the tap using a cloth and washing liquid if required, rinse and dry with a soft cloth.

Please do not use abrasive sponges or strong cleaners, including bleach, to clean your tap. These could damage your tap's finish and void the guarantee.

Guarantee

This product is guaranteed against any mechanical defect for 2 years. You should retain your dated invoice as proof of purchase to validate any claims under our guarantee. The guarantee will be valid from the date of purchase as shown on the sales invoice. This tap is intended for domestic use only. The guarantee does not apply to products installed outside a domestic environment.

What is covered by the warranty?

The repair or replacement of all or part of your tap if your tap is found to be defective due to faulty materials or manufacture within the relevant guarantee period at TapSpares UK's discretion.

If any part is no longer available, or out of manufacture, TapSpares UK reserve the right to replace it with a suitable alternative.

What is not covered by the warranty?

- Faulty installation, repairs or alterations not in accordance with the installation guide.
- Normal wear and tear.
- Accidental damage or faults caused by negligent use or care; misuse; neglect or careless operation.
- The use of anything other than genuine replacement parts.

Terms & conditions of the warranty

The guarantee is valid for the UK.

The guarantee becomes effective at the date of purchase or at the date of delivery if this is later.

Proof of purchase is required under the terms of the guarantee.

The guarantee provides benefits in addition to your statutory consumer rights.

How do I claim under my guarantee?

If you wish to discuss a claim, please call TapSpares UK on 01603 559096 Monday to Friday, between the hours of 9.00am and 4.00pm. Alternatively, you can email support@tapsparesuk.com.

TAP SPARES

RIVARO *Collection*



Vena

TS4920
Installation Guide

INTRODUCTION

This product has been designed and manufactured to the very highest quality standards. Correctly installed and properly maintained in accordance with the following instructions, it will provide you with many years of reliable service.

If you are considering carrying out the installation of your tap as a DIY project, we respectfully suggest you consider the risks associated with installing water appliances. TapSpare UK recommends you engage the services of a qualified installer.

The installation must be carried out in strict accordance with the instructions provided and comply with the UK Water Supply (Water Fittings) Regulations 1999 and safety standards.

INSTALLION REQUIREMENTS

Hole size: \varnothing 25mm

Hole centres: 140mm to 180mm

Max depth: 25mm / **With extension kit: 45mm** →

Connections: 15mm Copper / G1/2"

Minimum water pressure: 14.5PSI (1 bar)

Maximum water pressure: 75PSI (5 bar)

Maximum hot water temperature: 70°C

Recommended hot water temperature: 65°C

Single flow spout, ideally installed with equal supply pressures

Important Note: Exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve should be fitted in high water pressure situations.


BEFORE YOU BEGIN

Before installing the tap, it is essential that you thoroughly flush through the supply pipes in order to remove any remaining swarf, solder or other impurities. Failure to carry out this simple procedure could cause problems or damage to the workings of the tap.

Locate the existing hot and cold water supply pipes. **Important Note:** Hot supply should be on the left and cold supply on the right.

We recommend the installation of isolation valves on both water supplies to assist with future servicing requirements.

Shut off the mains water supply.

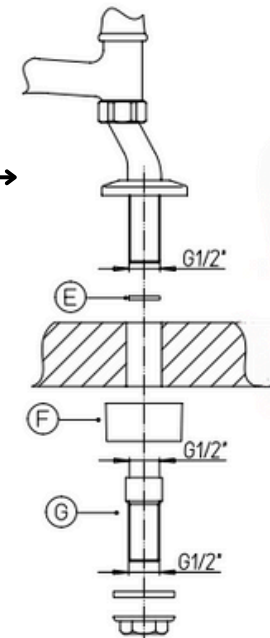

E	RUBBER SEAL	2
F	EXTENSION FLANGE	2
G	EXTENSION JOINT	2

THE INSTALLATION PROCEDURE

1. Ensure spout seals are clean then gently push spout (1) into tap body (2) until clip is resting on tap body. Tighten nut by hand.
2. Loosely fit the tap inlet unions (3) to the tap body ensuring seal faces are clean and washers are correctly positioned in the nuts.
3. The tap will require two 25mm holes spaced between 140mm to 180mm. **Important Note:** before cutting the holes, make sure that there is sufficient clearance of a minimum of 25mm between the centre of the tap holes and the splashback.
4. With seals in place under the union flange, insert the unions through the holes.
5. Working inside the cabinet, slide the gaskets (4) and screw the fixing nuts (5) onto the shanks to secure the tap to the surface. Ensure correct tap alignment is maintained, with the offset unions mirrored to centre the main tap. You can now fully tighten the union nuts and the fixing nuts.
6. Connect the 15mm copper compression fittings to the hot (left) and cold (right) supply unions and tighten them firmly to make a watertight seal.
7. With the levers in the open position, slowly turn on the water supply and check the installation for leaks. Your tap is now ready for use (as a precaution we recommend checking for leaks again before retiring for the night).

