

## CARE INSTRUCTIONS & WARRANTY INFORMATION FOR YOUR TAP

Thank you for purchasing a TapSpares UK Rivaro kitchen tap.

### Care & Maintenance

Your tap's finish has a 1 year guarantee. Wipe over the tap using a cloth and washing liquid if required, rinse and dry with a soft cloth.

Please do not use abrasive sponges or strong cleaners, including bleach, to clean your tap. These could damage your tap's finish and void the guarantee.

### Guarantee

This product is guaranteed against any mechanical defect for 2 years. You should retain your dated invoice as proof of purchase to validate any claims under our guarantee. The guarantee will be valid from the date of purchase as shown on the sales invoice. This tap is intended for domestic use only. The guarantee does not apply to products installed outside a domestic environment.

### What is covered by the warranty?

The repair or replacement of all or part of your tap if your tap is found to be defective due to faulty materials or manufacture within the relevant guarantee period at TapSpares UK's discretion.

If any part is no longer available, or out of manufacture, TapSpares UK reserve the right to replace it with a suitable alternative.

### What is not covered by the warranty?

- Faulty installation, repairs or alterations not in accordance with the installation guide.
- Normal wear and tear.
- Accidental damage or faults caused by negligent use or care; misuse; neglect or careless operation.
- The use of anything other than genuine replacement parts.

### Terms & conditions of the warranty

The guarantee is valid for the UK.

The guarantee becomes effective at the date of purchase or at the date of delivery if this is later.

Proof of purchase is required under the terms of the guarantee.

The guarantee provides benefits in addition to your statutory consumer rights.

### How do I claim under my guarantee?

If you wish to discuss a claim, please call TapSpares UK on 01603 559096 Monday to Friday, between the hours of 9.00am and 4.00pm. Alternatively, you can email [support@tapsparesuk.com](mailto:support@tapsparesuk.com).

# TAP SPARES

# RIVARO *Collection*



## Varo

**TS4944**  
Installation Guide

## INTRODUCTION

This product has been designed and manufactured to the very highest quality standards. Correctly installed and properly maintained in accordance with the following instructions, it will provide you with many years of reliable service.

If you are considering carrying out the installation of your tap as a DIY project, we respectfully suggest you consider the risks associated with installing water appliances. TapSpare UK recommends you engage the services of a qualified installer.

The installation must be carried out in strict accordance with the instructions provided and comply with the UK Water Supply (Water Fittings) Regulations 1999 and safety standards.

## INSTALLATION REQUIREMENTS

Hole size:  $\varnothing$ 35mm

Max depth: 45mm

Connections: G1/2"

Minimum water pressure: 7PSI (0.5 bar)

Maximum water pressure: 75PSI (5 bar)

Maximum hot water temperature: 70°C

Recommended hot water temperature: 65°C

Biflow spout, suited to unequal supply pressures

**Important Note:** Exceeding these temperatures or water pressures can result in damage to the tap. A pressure reducing valve should be fitted in high water pressure situations.

## BEFORE YOU BEGIN

Before installing the tap, it is essential that you thoroughly flush through the supply pipes in order to remove any remaining swarf, solder or other impurities. Failure to carry out this simple procedure could cause problems or damage to the workings of the tap.


Locate the existing hot and cold water supply pipes. **Important Note:** Ensure the flexible hoses are both within comfortable reach of their respective connection points, without them having to be compressed, stretched or kinked.

We recommend the installation of isolation valves on both water supplies to assist with future servicing requirements.

Shut off the mains water supply.

## THE INSTALLATION PROCEDURE

1. On the inlet flexes (2) ensure the o-ring seals are clean and in place, and moisten. Fit the tap fixing stud bolt (1) and inlet flexes (2) into the tap body (3), tightening by hand.
2. The tap will require a standard 35mm hole. **Important Note:** before cutting the hole, make sure there is sufficient clearance of a minimum of 25mm between the centre of the tap hole and the splashback.
3. With base ring (4) and seal (5) in place, insert the flexible hoses through the hole.
4. Working inside the cabinet, slide the gasket (6) and the clamp plate (7) over the hoses and the stud at the base of the tap. Screw the clamp nut (8) onto the stud using a 12mm spanner, ensuring correct tap alignment is maintained.

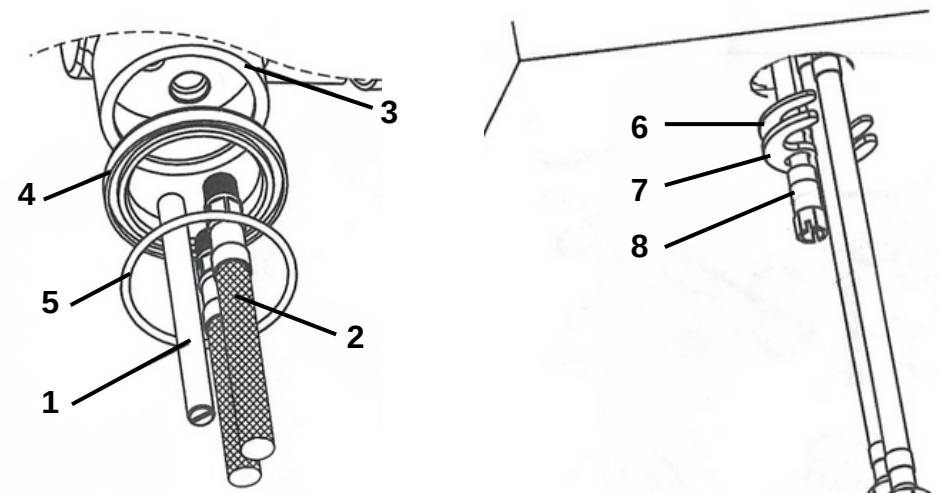

5. Connect the hot and cold G1/2" flexible hoses to the respective supplies and tighten them firmly to make a watertight seal. The tap hose on the right-hand side should be connected to the cold supply and the hose on the left-hand side to the hot supply.
6. With the levers in the open position, slowly turn on the water supply and check the installation for leaks. Your tap is now ready for use (as a precaution, we recommend checking for leaks again before retiring for the night).